



## LANCOM 1780EW-4G

High-performance business VPN router with LTE/4G, WLAN and Gigabit Ethernet for secure site networking

The LANCOM 1780EW-4G is a professional, high-performance VPN router with 100 Mbps LTE/4G and 450 Mbps Wi-Fi. It is ideal for providing mobile, high-speed access to company networks via a secure VPN connection, while at the same time supporting a Wi-Fi network. Alternatively, the Gigabit Ethernet port enables the device to operate with an external modem. The right choice for secure, reliable and sustainable networking solutions "Made in Germany".

- › Versatile business VPN router with LTE/4G cellular networking for up to 100 Mbps
- › Wi-Fi based on IEEE 802.11n for up to 450 Mbps.
- › Gigabit Ethernet interface for connection to external modems
- › Secure site connectivity with 5 simultaneous IPsec VPN connections (25 channels optional)
- › Integrated stateful-inspection firewall with intrusion detection and Denial-of-Service protection
- › Network virtualization with up to 16 networks on one device (ARF)
- › Security Made in Germany
- › Maximum future compatibility, reliability, and security

# LANCOM 1780EW-4G

## Integrated 4G LTE modem for data rates up to 100 Mbps

The integrated LTE/4G modem of the LANCOM 1780EW-4G offers high-speed 4G connections at up to 100 Mbps. By enabling mobile operation in this way, the LANCOM 1780EW-4G supports, for example, a mobile conference room that offers temporary yet secure Wi-Fi access to company networks.

## Wi-Fi based on IEEE 802.11n

Featuring IEEE 802.11n Wi-Fi, the LANCOM 1780EW-4G provides wireless networking to clients in the 2.4- or 5-GHz frequency range at speeds of up to 450 Mbps. Secure wireless LAN with the LANCOM 1780EW-4G is assured by its wide range of supported security standards, including IEEE 802.1i (WPA2) and IEEE 802.1X. Thanks to multi-SSID, the wireless LAN also supports multiple networks that are securely separated from one another.

## High-speed Internet thanks to Gigabit Ethernet

The Gigabit Ethernet interface makes this router ideal for connection to external modems. This forms the basis for high-speed Internet access at retail stores, offices, and home offices.

## Stateful inspection firewall

Equipped with a stateful inspection firewall, the LANCOM 1780EW-4G protects the entire network. With features such as intrusion prevention and Denial-of-Service protection, this business VPN router provides optimal protection and secures all of the data on the network.

## Advanced Routing & Forwarding

The LANCOM 1780EW-4G provides up to 16 securely isolated IP contexts, each of which has its own separate routing. This is an elegant way of operating IP applications with one central router and keeping the different communication channels securely separated from one another.

## Maximum future-proofing

LANCOM products are based on professional expertise, years of experience in IT, and high-quality materials. All of our devices are equipped with hardware that is dimensioned for the future and, even reaching back to older product generations, updates to the LANCOM Operating System—LCOS—are available several times a year, free of charge. This guarantees a long service life while staying technically up to date, which represents a true protection of your investment.

## Secure site connectivity via VPN

The LANCOM 1780EW-4G offers high levels of security. The standard equipment of 5 IPsec VPN channels guarantees strong encryption, secure connections for mobile employees, and protection of corporate data. The LANCOM VPN option upgrades the router to support 25 VPN channels. This ensures that your network is perfectly scalable and can grow on demand—without additional hardware components.

## Security Made in Germany

In a market with a strong presence of American and Asian products, LANCOM offers maximum security "Made in Germany". The entire LANCOM core product range is developed and manufactured in Germany, and tested according to the highest standards of security, data protection and quality. The company's own "closed-source" operating system LCOS is developed at the company headquarters in Germany. Our in-house team of developers works in a highly secure environment as certified by the BSI (German Federal Office for Information Security), all of which is subject to the highest standards of security, encryption, and quality.

## LANCOM 1780EW-4G

LCOS 10.00

WLAN product specifications	
Frequency band 2.4 GHz or 5 GHz	2400-2483.5 MHz (ISM) or 5150-5825 MHz (depending on country-specific restrictions)
Data rates IEEE 802.11n	450 Mbps according to IEEE 802.11n with MCS23 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11a/n, IEEE 802.11g/n, IEEE 802.11b/g/n or IEEE 802.11b/g compatibility mode or pure IEEE 802.11n, pure IEEE 802.11a, IEEE 802.11g or pure IEEE 802.11b mode and data rates selectable
Data rates IEEE 802.11a/ h	54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection) and data rates selectable
Data rates IEEE 802.11b/g	54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection) compatible to IEEE 802.11b (11, 5.5, 2, 1 Mbps, Automatic Rate Selection), IEEE 802.11b/g compatibility mode or pure IEEE 802.11g or pure IEEE 802.11b and data rates selectable
Range IEEE 802.11a/b/g *	Up to 150 m (up to 30 m in buildings)
Output power at radio module, 5 GHz	IEEE 802.11a/h: +17 up to +18 dBm @ 6 up to 48 Mbps, +13 up to +15 dBm @ 54 Mbps, IEEE 802.11n: +17 up to +18 dBm @ (MCS0/8, 20 MHz), +11 up to +13 dBm @ (MCS7/15, 20 MHz), +16 up to +17 dBm @ (MCS0/8, 40 MHz), +9 up to +12 dBm @ (MCS7/15, 40 MHz)
Output power at radio module, 5 GHz	IEEE 802.11a/h: +17 up to +18 dBm @ 6 up to 48 Mbps, +13 up to +15 dBm @ 54 Mbps, IEEE 802.11n: +17 up to +18 dBm @ (MCS0/8/16, 20 MHz), +11 up to +13 dBm @ (MCS7/15/23, 20 MHz), +16 up to +17 dBm @ (MCS0/8/16, 40 MHz), +9 up to +12 dBm @ (MCS7/15/23, 40 MHz)
Output power at radio module, 2.4 GHz	IEEE 802.11b: +22 dBm @ 1 and 2 Mbps, +22 dBm @ 5,5 and 11 Mbps, IEEE 802.11g: +22 dBm @ 6 up to 36 Mbps, +20 dBm @ 48 Mbps, +18 dBm @ 54 Mbps, IEEE 802.11n: +22 dBm @ (MCS0/8, 20 MHz), +16 dBm @ (MCS7/15, 20 MHz), +21 dBm @ (MCS0/8, 40 MHz), +15 dBm @ (MCS7/15, 40 MHz)
Output power at radio module, 2.4 GHz	IEEE 802.11b: +22 dBm @ 1 and 2 Mbps, +22 dBm @ 5,5 and 11 Mbps, IEEE 802.11g: +22 dBm @ 6 up to 36 Mbps, +20 dBm @ 48 Mbps, +18 dBm @ 54 Mbps, IEEE 802.11n: +22 dBm @ (MCS0/8/16, 20 MHz), +16 dBm @ (MCS7/15/23, 20 MHz), +21 dBm @ (MCS0/8/16, 40 MHz), +15 dBm @ (MCS7/15/23, 40 MHz)
Max. allowed radiation power (EIRP), 5 GHz	IEEE 802.11a/h: Up to 30 dBm / 1000 mW EIRP (depending on national regulations on channel usage and subject to further obligations such as TPC and DFS)
Max. allowed radiation power (EIRP), 2.4 GHz	IEEE 802.11b/g: Up to 20 dBm / 100 mW EIRP (transmission power control according to TPC)
Minimum transmission power	Transmission power reduction in software in 1 dB steps to min. 0.5 dBm
Receiver sensitivity, 5 GHz	IEEE 802.11a/h: -93 dBm @ 6 Mbps, -79 up to -80 dBm @ 54 Mbps, IEEE 802.11n: -93 dBm @ 6,5 Mbps (MCS0, 20 MHz), -77 dBm @ 65 Mbps (MCS7, 20 MHz), -89 up to -90 dBm @ 15 Mbps (MCS0, 40 MHz), -69 up to -74 dBm @ 150 Mbps (MCS7, 40 MHz)
Receiver sensitivity 2.4 GHz	IEEE 802.11b: -90 up to -91 dBm @ 11 Mbps, -101 dBm @ 1 Mbps, IEEE 802.11g: -94dBm @ 6 Mbps, -80 up to 81dBm @ 54 Mbps, IEEE 802.11n: -94 dBm @ (MCS0, 20 MHz), -77 to -78 dBm @ (MCS7, 20 MHz), -91 dBm @ (MCS0, 40 MHz), -75 to -76 dBm @ (MCS7, 40 MHz)
Radio channels 5 GHz	Up to 26 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations)
Radio channels 2.4 GHz	Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions)
Multi-SSID	Up to 16 independent WLAN networks
Concurrent WLAN clients	Up to 100 clients (recommended), 512 clients (max.)
*) Note	The effective distances and transmission rates that can be achieved are depending of the onsite RF conditions
Supported WLAN standards	
IEEE standards	IEEE 802.11n, IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X, IEEE 802.11u, IEEE 802.11r (Fast Roaming), IEEE 802.11w (Protectet Management Frames), WME and U-APSD/WMM Power Save as defined in IEEE 802.11e, IEEE 802.11h, IEEE 802.11d
Standard IEEE 802.11n	
Supported features	2x2 MIMO @ radio 1, 3x3:2 MIMO @ radio 2, 40-MHz channels, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval
Supported features	3x3 MIMO, 40 MHz channels, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval

## LANCOM 1780EW-4G

LCOS 10.00

WLAN operating modes	
Modes	WLAN access point (standalone, WLC or LANCOM Management Cloud managed), WLAN bridge (P2P or P2MP) (standalone or AutoWDS*), (standalone, WLC or LANCOM Management Cloud managed), WLAN client mode, transparent WLAN client mode
*) Note	Only in installations with WLAN controller
Security	
Encryption options	IEEE 802.1X (WPA2-Enterprise), IEEE 802.11i (WPA2-Personal), Wi-Fi Certified™ WPA2™, WPA, WEP, IEEE 802.11w (Protected Management Frames), LEPS (LANCOM Enhanced Passphrase Security)
Encryption	AES:CCMP (Advanced Encryption Standard with Counter Mode and Cipher Block Chaining Message Authentication Code Protocol), TKIP (Temporal Key Integrity Protocol), RC4 (only used by WEP)
EAP types (authenticator)	EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-AKA Prime, EAP-FAST
RADIUS/EAP-server	User administration MAC-based, rate limiting, passphrases, VLAN user based, authentication of IEEE 802.1X clients via EAP-TLS, EAP-TTLS, EAP-MD5, EAP-GTC, PEAP, MSCHAP or MSCHAPv2
Others	WLAN protocol filters, IP-redirection of any packet received over the WLAN interface, IEEE 802.1X supplicant, background scanning, client detection ("rogue WLAN client detection"), Wireless Intrusion Detection System (WIDS), RADIUS CoA (Change of Authorization)
LANCOM Active Radio Control	
Client Steering*	Steering of WLAN clients to the ideal access point
Managed RF Optimization*	Selection of optimal WLAN channels by the administrator
Adaptive Noise Immunity	Better WLAN throughput due to immunity against interferences
Spectral Scan	Monitoring your WLAN for sources of interference
Adaptive RF Optimization	Dynamic selection of the optimal WLAN channel
Airtime Fairness	Improved utilization of the WLAN bandwidth
Adaptive Transmission Power	Automatic adjustment of the transmission power for Wi - Fi backup scenarios
*) Note	Only in installations with WLAN controller
Roaming	
Roaming	IAPP (Inter Access Point Protocol), IEEE 802.11r (Fast Roaming), OKC (Opportunistic Key Caching), Fast Client Roaming (only in operating mode client modus)
LTE modem	
Supported standards	LTE, UMTS, HSPA, Edge and GPRS support (mode of transmission automatically or manually adjustable)
LTE-bands	800/900/1800/2100/2600 MHz (automatically or manually adjustable)
UMTS and HSPA bands	900/2100 MHz
EDGE/GPRS bands	850/900/1800/1900 MHz
Maximum transmission power UMTS/HSPA	+24 dBm
Diversity support	Receive diversity on the aux antenna (2G + 3G); MIMO (2x2) for LTE (4G)
GPS	GPS positioning with optional external GPS antenna (accessory)
Supported SIM card formats	Mini-SIM (2FF), Micro-SIM (3FF) via adaptor, Nano-SIM (4FF) via adaptor
Multi-SIM support	Supported
Layer 2 features	
VLAN	4.096 IDs based on IEEE 802.1q, dynamic assignment, Q-in-Q tagging
Quality of Service	WME based on IEEE 802.11e, Wi-Fi Certified™ WMM®
Rate limiting	SSID based, WLAN client based
Multicast	IGMP-Snooping
Protocols	Ethernet over GRE-Tunnel (EoGRE), ARP-Lookup, LLDP, DHCP option 82, IPv6-Router-Advertisement-Snooping, DHCPv6-Snooping, LDRA (Lightweight DHCPv6 Relay Agent), Spanning Tree, Rapid Spanning Tree, ARP, Proxy ARP, BOOTP, DHCP

## LANCOM 1780EW-4G

LCOS 10.00

Layer 3 features	
Firewall	Stateful inspection firewall including packet filtering, extended port forwarding, N:N IP address mapping, packet tagging, user-defined rules and notifications
Quality of Service	Traffic shaping, bandwidth reservation, DiffServ/TOS, packet size control, layer-2-in-layer-3 tagging
Security	Intrusion Prevention, IP spoofing, access control lists, Denial of Service protection, detailed settings for handling reassembly, session-recovery, PING, stealth mode and AUTH port, URL blocker, password protection, programmable reset button
PPP authentication mechanisms	PAP, CHAP, MS-CHAP, and MS-CHAPv2
High availability / redundancy	VRRP (Virtual Router Redundancy Protocol), analog/GSM modem backup
Router	IPv4-, IPv6-, NetBIOS/IP multiprotocol router, IPv4/IPv6 dual stack
Router virtualization	ARF (Advanced Routing and Forwarding) up to separate processing of 16 contexts
IPv4 services	HTTP and HTTPS server for configuration by web interface, DNS client, DNS server, DNS relay, DNS proxy, dynamic DNS client, DHCP client, DHCP relay and DHCP server including autodetection, NetBIOS/IP proxy, NTP client, SNTP server, policy-based routing, Bonjour-Proxy
IPv6 services	HTTP and HTTPS server for configuration by web interface, DHCPv6 client, DHCPv6 server, DHCPv6 relay, DNS client, DNS server, dynamic DNS client, NTP client, SNTP server, Bonjour-Proxy
IPv6 compatible LCOS applications	WEBconfig, HTTP, HTTPS, SSH, Telnet, DNS, TFTP, firewall, RAS dial-in
Dynamic routing protocol	RIPv2, BGPv4
IPv4 protocols	DNS, HTTP, HTTPS, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RADSEC (secure RADIUS), RTP, SNMPv1,v2c,v3, TFTP, TACACS+
IPv6 protocols	NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, RADIUS, SMTP, NTP, BGP, Syslog, SNMPv1,v2c,v3
WAN operating mode	VDSL, ADSL1, ADSL2 or ADSL2+ additional with external DSL modem at an ETH port
WAN protocols	PPPoE, Multi-PPPoE, ML-PPP, GRE, EoGRE, PPTP (PAC or PNS), L2TPv2 (LAC or LNS) and IPoE (using DHCP or no DHCP), RIP-1, RIP-2, VLAN, IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IP(v6)oE (autokonfiguration, DHCPv6 or static)
Tunneling protocols (IPv4/IPv6)	6to4, 6in4, 6rd (static and over DHCP), Dual Stack Lite (IPv4-in-IPv6-Tunnel)
Security	
Intrusion Prevention	Monitoring and blocking of login attempts and port scans
IP spoofing	Source IP address check on all interfaces: only IP addresses belonging to the defined IP networks are allowed
Access control lists	Filtering of IP or MAC addresses and preset protocols for configuration access
Denial of Service protection	Protection from fragmentation errors and SYN flooding
General	Detailed settings for handling reassembly, PING, stealth mode and AUTH port
Password protection	Password-protected configuration access can be set for each interface
Alerts	Alerts via e-mail, SNMP traps and SYSLOG
Authentication mechanisms	EAP-TLS, EAP-TTLS, PEAP, MS-CHAP, MS-CHAPv2 as EAP authentication mechanisms, PAP, CHAP, MS-CHAP and MS-CHAPv2 as PPP authentication mechanisms
GPS anti-theft	Network protection via site verification by GPS positioning, device stops operating if its location is changes
WLAN protocol filters	Limitation of the allowed transfer protocols, source and target addresses on the WLAN interface
Adjustable reset button	Adjustable reset button for 'ignore', 'boot-only' and 'reset-or-boot'
IP redirect	Fixed redirection of any packet received over the WLAN interface to a dedicated target address
High availability / redundancy	
VRRP	VRRP (Virtual Router Redundancy Protocol) for backup in case of failure of a device or remote station.
FirmSafe	For completely safe software upgrades thanks to two stored firmware versions, incl. test mode for firmware updates
LTE-Backup	In case of failure of the main connection, a backup connection is established over the internal LTE modem; automatic return to the main connection

## LANCOM 1780EW-4G

LCOS 10.00

High availability / redundancy	
Analog/GSM modem backup	Optional operation of an analog or GSM modem at the serial interface
Load balancing	Static and dynamic load balancing over up to 2 WAN connections. Channel bundling with Multilink PPP (if supported by network operator)
VPN redundancy	Backup of VPN connections across different hierarchy levels, e.g. in case of failure of a central VPN concentrator and re-routing to multiple distributed remote sites. Any number of VPN remote sites can be defined (the tunnel limit applies only to active connections). Up to 32 alternative remote stations, each with its own routing tag, can be defined per VPN connection. Automatic selection may be sequential, or dependant on the last connection, or random (VPN load balancing)
Line monitoring	Line monitoring with LCP echo monitoring, dead-peer detection and up to 4 addresses for end-to-end monitoring with ICMP polling
VPN	
IPSec over HTTPS	Enables IPSec VPN based on TCP (at port 443 like HTTPS) which can go through firewalls in networks where e. g. port 500 for IKE is blocked. Suitable for client-to-site connections and site-to-site connections. IPSec over HTTPS is based on the NCP VPN Path Finder technology
Number of VPN tunnels	Max. number of concurrent active IPSec, PPTP (MPPE) and L2TPv2 tunnels: 5 (25 with VPN 25 Option). Unlimited configurable connections. Configuration of all remote sites via one configuration entry when using the RAS user template or Proadaptive VPN.
Hardware accelerator	Integrated hardware accelerator for 3DES/AES encryption and decryption
Realtime clock	Integrated, buffered realtime clock to save the date and time during power failure. Assures timely validation of certificates in any case
Random number generator	Generates real random numbers in hardware, e. g. for improved key generation for certificates immediately after switching-on
1-Click-VPN Client assistant	One click function in LANconfig to create VPN client connections, incl. automatic profile creation for the LANCOM Advanced VPN Client
1-Click-VPN Site-to-Site	Creation of VPN connections between LANCOM routers via drag and drop in LANconfig
IKE, IKEv2	IPSec key exchange with Preshared Key or certificate (RSA signature, digital signature)
Smart Certificate*	Convenient generation of digital X.509 certificates via an own certification authority (SCEP-CA) on the webpage or via SCEP.
Certificates	X.509 digital multi-level certificate support, compatible with Microsoft Server / Enterprise Server and OpenSSL. Secure Key Storage protects a private key (PKCS#12) from theft.
Certificate rollout	Automatic creation, rollout and renewal of certificates via SCEP (Simple Certificate Enrollment Protocol) per certificate hierarchy
Certificate revocation lists (CRL)	CRL retrieval via HTTP per certificate hierarchy
OCSP Client	Check X.509 certifications by using OCSP (Online Certificate Status Protocol) in real time as an alternative to CRLs
XAUTH	XAUTH client for registering LANCOM routers and access points at XAUTH servers incl. IKE-config mode. XAUTH server enables clients to register via XAUTH at LANCOM routers. Connection of the XAUTH server to RADIUS servers provides the central authentication of VPN-access with user name and password. Authentication of VPN-client access via XAUTH and RADIUS connection additionally by OTP token
RAS user template	Configuration of all VPN client connections in IKE ConfigMode via a single configuration entry
Proadaptive VPN	Automated configuration and dynamic creation of all necessary VPN and routing entries based on a default entry for site-to-site connections. Propagation of dynamically learned routes via RIPv2 if required
Algorithms	3DES (168 bit), AES (128, 192 or 256 bit), Blowfish (128 bit), RSA (1024-4096 bit) and CAST (128 bit). OpenSSL implementation with FIPS-140 certified algorithms. MD-5, SHA-1, SHA-256, SHA-384 or SHA-512 hashes
NAT-Traversal	NAT-Traversal (NAT-T) support for VPN over routes without VPN passthrough
IPCOMP	VPN data compression based on LZS or Deflate compression for higher IPSec throughput on low-bandwidth connections (must be supported by remote endpoint)
Dynamic DNS	Enables the registration of IP addresses with a Dynamic DNS provider in the case that fixed IP addresses are not used for the VPN connection
Specific DNS forwarding	DNS forwarding according to DNS domain, e.g. internal names are translated by proprietary DNS servers in the VPN. External names are translated by Internet DNS servers
IPv4 VPN	Connecting private IPv4 networks
IPv4 VPN over IPv6 WAN	Use of IPv4 VPN over IPv6 WAN connections
IPv6 VPN	Connecting private IPv6 networks

## LANCOM 1780EW-4G

LCOS 10.00

VPN	
IPv6 VPN over IPv4 WAN	Use of IPv6 VPN over IPv4 WAN connections
Radius	Radius authorization and accounting, outsourcing of VPN configurations in external RADIUS server in IKEv2
*)	Only with VPN 25 option
Performance	
Routing-Performance	Data regarding the overall routing performance can be found inside the LANCOM tech paper "Routing-Performance" on <a href="http://www.lancom-systems.eu">www.lancom-systems.eu</a>
VoIP	
SIP ALG	The SIP ALG (Application Layer Gateway) acts as a proxy for SIP communication. For SIP calls the ALG opens the necessary ports for the corresponding media packets. Automatic address translation (STUN is no longer needed).
Interfaces	
ETH1 (PoE)	10/100/1000 Base-T, autosensing, auto node hub, PoE compliant with IEEE 802.3af/at. The port supports energy saving according to IEEE 802.3az
ETH2	10/100/1000 Base-T, default WAN port, configurable as LAN port. Der Port unterstützt Energiesparfunktionen nach IEEE 802.3az
Serial interface	Serial configuration interface / COM port (8 pin Mini-DIN): 9,600 - 115,000 baud, suitable for optional connection of analog/GPRS modems. Supports internal COM port server and allows for transparent asynchronous transmission of serial data via TCP
External antenna connectors	Two reverse SMA connectors
External antenna connectors	Two SMA antenna connectors for external LTE antennas (Ant 1, Ant 2) additional connector for optional GPS antenna (not included in package content)
Internal antenna	Radio module uses one internal antenna.
Hardware	
Power supply	12 V DC, external power adapter (230 V) with bayonet cap.
Power supply	Via Power over Ethernet, compliant with IEEE 802.3af*/at
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 210 x 45 x 140 mm (W x H x D)
*) Note	It is recommended to use a PoE adapter or switch with IEEE 802.3at support. Using PoE with IEEE 802.3af the LTE module ist not available.
Management and monitoring	
Management	LANCOM Management Cloud, LANconfig, WEBconfig, WLAN controller, LANCOM Layer 2 management (emergency management)
Management functions	Alternative boot configuration, voluntary automatic updates for LCMS and LCOS, individual access and function rights up to 16 administrators, RADIUS and RADSEC user management, remote access (WAN or (W)LAN, access rights (read/write) adjustable seperately), SSL, SSH, HTTPS, Telnet, TFTP, SNMP, HTTP, access rights via TACACS+, scripting, timed control of all parameters and actions through cron job
FirmSafe	Two stored firmware versions, incl. test mode for firmware updates
Monitoring	LANCOM Management Cloud, LANmonitor, WLANmonitor
Monitoring functions	Device SYSLOG, SNMPv1,v2c,v3 incl. SNMP-TRAPS, extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, internal logging buffer for firewall events
Monitoring statistics	Extensive Ethernet, IP and DNS statistics; SYSLOG error counter, accounting information exportable via LANmonitor and SYSLOG, Layer 7 Application Detection including application-centric tracking of traffic volume
iPerf	iPerf is a tool for measurements of the bandwidth on IP networks (integrated client and server)
SLA-Monitor (ICMP)	Performance monitoring of connections
SD-WLAN	SD-WLAN – automatic WLAN configuration via the LANCOM Management Cloud
SD-LAN	SD-LAN – automatic LAN configuration via the LANCOM Management Cloud
SD-WAN	SD-WAN – automatic WAN configuration via the LANCOM Management Cloud
Hardware	
Weight	1,32 lbs (600 g)

## LANCOM 1780EW-4G

LCOS 10.00

Hardware	
Power supply	12 V DC, external power adapter (230 V) with bayonet cap to protect against accidentally unplugging
Power supply	Via Power over Ethernet, compliant with IEEE 802.3af*/at
Environment	Temperature range 0–35° C; humidity 0–95%; non-condensing; Temperature range 0–40° C in a vertical mounting position using the LANCOM Wall Mount with cable routing to the side
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 210 x 45 x 140 mm (W x H x D)
Fans	None; fanless design without rotating parts, high MTBF
Power consumption (max)	Approx. 16.83 watt with 12 V/ 1,5 A power supply adapter (total power consumption of access point and power supply adapter), approx. 19 watt via PoE
*) Note	It is recommended to use a PoE adapter or switch with IEEE 802.3at support. Using PoE with IEEE 802.3af the LTE module ist not available.
Declarations of conformity*	
CE	EN 60950-1, EN 301 489-1, EN 301 489-17, EN 301 489-24
Wi-Fi Alliance Certification	Wi-Fi Certified
5 GHz WLAN	EN 301 893
2.4 GHz WLAN	EN 300 328
IPv6	IPv6 Ready Gold
Country of Origin	Made in Germany
*) Note	You will find all declarations of conformity in the products section of our website at <a href="http://www.lancom-systems.eu">www.lancom-systems.eu</a>
Scope of delivery	
Manual	Hardware Quick Reference (DE/EN), Installation Guide (DE/EN)
CD/DVD	Data medium with management software (LANconfig, LANmonitor, WLANmonitor, LANCAPI) and documentation
Cable	2 Ethernet cables, 3m
Antennas	Two 3 dBi dipole antennas (Gain depends on frequency.)
Antennas	Two 2 dBi Edge/UMTS/LTE-antennas
GPS antenna	Passive GPS antenna can be ordered free of charge with enclosed voucher
Power supply unit	External power adapter (230 V), NEST 12 V/1.5 A DC/S, coaxial power connector 2.1/5.5 mm bayonet, temperature range from -5 to +45° C, LANCOM item no. 111301 (EU)/LANCOM item no 110829 (UK)
Support	
Warranty	3 years support via hotline and Internet KnowledgeBase
Software updates	Regular free updates (LCOS operating system and LANtools) via Internet
Options	
VPN	LANCOM VPN-25 Option (25 channels), item no. 60083
LANCOM Content Filter	LANCOM Content Filter +10 user, 1 year subscription, item no. 61590
LANCOM Content Filter	LANCOM Content Filter +25 user, 1 year subscription, item no. 61591
LANCOM Content Filter	LANCOM Content Filter +100 user, 1 year subscription, item no. 61592
LANCOM Content Filter	LANCOM Content Filter +10 user, 3 year subscription, item no. 61593
LANCOM Content Filter	LANCOM Content Filter +25 user, 3 year subscription, item no. 61594
LANCOM Content Filter	LANCOM Content Filter +100 user, 3 year subscription, item no. 61595
LANCOM Warranty Basic Option S	Option to extend the manufacturer's warranty from 3 to 5 years, item no. 10710
LANCOM Warranty Advanced Option S	Option to extend the manufacturer's warranty from 3 to 5 years and replacement of a defective device, item no. 10715



## LANCOM 1780EW-4G

LCOS 10.00

Options	
LANCOM Public Spot	Hotspot option for LANCOM access points and the LANCOM 17xx series for user authentication (up to 64), versatile access (via voucher, e-mail, SMS), including a comfortable setup wizard, secure separation of guest access and internal network, item no. 60642
LANCOM Public Spot PMS Accounting Plus	Extension of the LANCOM Public Spot (XL) Option for the connection to hotel billing systems with FIAS interface (such as Micros Fidelio) for authentication and billing of guest accesses for 178x routers, WLCs, and current central-site gateways, item no. 61638
LANCOM Management Cloud	
LANCOM LMC-B-1Y LMC License	LANCOM LMC-B-1Y License (1 Year), enables the management of one category B device for one year via the LANCOM Management Cloud, item no. 50103
LANCOM LMC-B-3Y LMC License	LANCOM LMC-B-3Y License (3 Years), enables the management of one category B device for three years via the LANCOM Management Cloud, item no. 50104
Accessories	
LANCOM WLAN controllers	LANCOM WLC-4006+, item no. 62035 (EU), item no. 62036 (UK) and item no. 62037 (US), LANCOM WLC-4025+, item no. 61378, item no. 61379 and item no. 61384 (US), LANCOM WLC-4100, item no. 61369 (EU) and item no. 61377 (UK), LANCOM WLC Basic Option for Routers, item no. 61639
External antenna	AirLancer Extender O-360-3G 4 dBi omnidirectional GSM/GPRS/EDGE/3G outdoor antenna, item no. 61225
External antenna	AirLancer Extender I-360-3G 2dBi GSM/GPRS/EDGE, 5dBi 3G, omnidirectional indoor antenna, item no. 60916
External antenna	AirLancer Extender O-360-4G omnidirectional GSM/GPRS/EDGE/UMTS/HSPA+/LTE outdoor antenna, item no. 61227
External antenna	AirLancer Extender I-360-4G, +2.5 dBi 4G/3G/2G antenna, 698-960 and 1710-2700 MHz, omnidirectional MIMO indoor antenna, item no. 60918
19" Rack Mount	19" rack mount adaptor, item no. 61501
LANCOM Wall Mount	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61349
LANCOM Wall Mount (White)	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61345
LANCOM Serial Adapter Kit	For the connection of V.24 modems with AT command set and serial interface for the connection to the LANCOM COM interface, incl. serial cable and connection plug, item no. 61500
VPN Client Software	LANCOM Advanced VPN Client for Windows Vista, Windows 7, Windows 8, Windows 8.1, Windows 10, single license, item no. 61600
VPN Client Software	LANCOM Advanced VPN Client for Windows Vista, Windows 7, Windows 8, Windows 8.1, Windows 10, 10 licenses, item no. 61601
VPN Client Software	LANCOM Advanced VPN Client for Windows Vista, Windows 7, Windows 8, Windows 8.1, Windows 10, 25 licenses, item no. 61602
VPN Client Software	LANCOM Advanced VPN Client for Mac OS X (10.5 Intel only, 10.6 or higher), single license, item no. 61606
VPN Client Software	LANCOM Advanced VPN Client for Mac OS X (10.5 Intel only, 10.6 or higher), 10 licenses, item no. 61607
*) Note	The polarization diversity antennas require 2 cables and surge arrestors
Item number(s)	
LANCOM 1780EW-4G (EU)	61726


# LANCOM 1780EW-4G

LCOS 10.00

Item number(s)

LANCOM 1780EW-4G (UK)

61727

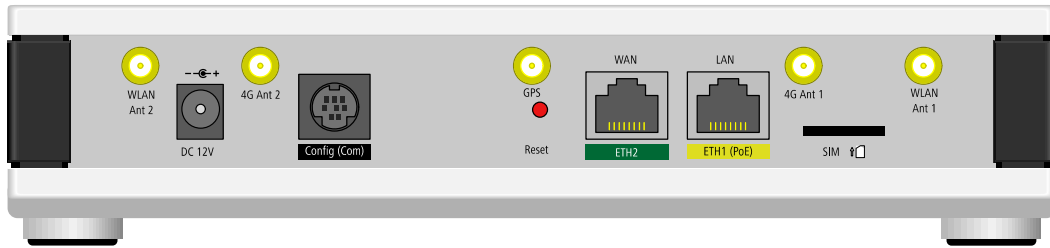

LANCOM, LANCOM Systems and LCOS are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. Subject to change without notice. No liability for technical errors and/or omissions. 04/17