

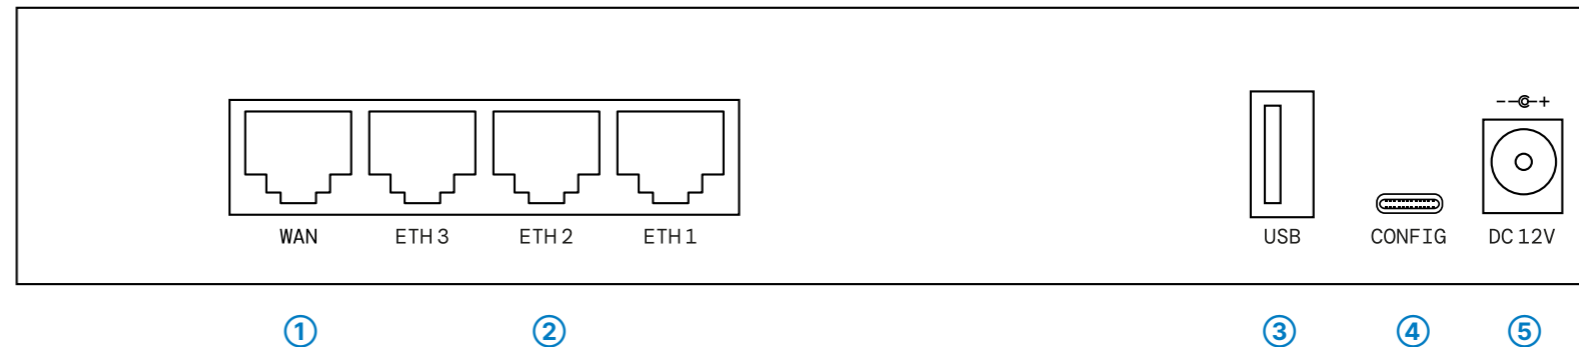


Mounting & connecting


Hardware Quick Reference LANCOM 1650E

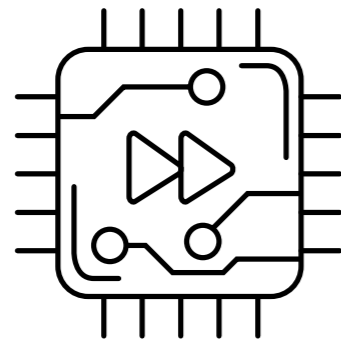

- 1 WAN interface**
Use an Ethernet cable to connect the WAN interface to your WAN modem.
- 2 Ethernet interfaces**
Use the enclosed Ethernet cable to connect one of the interfaces ETH 1 to ETH 3 to your PC or a LAN switch.



- 3 USB interface**
Connect a USB data medium or a USB printer to the USB interface. (cable not supplied)
- 4 Serial USB-C configuration interface**
A USB-C cable can be used for optional configuration of the device on the serial console. (cable not included)
- 5 Power supply connection socket**
Use only the supplied power adapter!



Before initial startup, please make sure to take notice of the information regarding the intended use in the enclosed installation guide!

Operate the device only with a professionally installed power supply at a nearby power socket that is freely accessible at all times.

The power plug of the device must be freely accessible.

Please note that support for third-party accessories is not provided.



Please observe the following when setting up the device

- When setting up on the table, use the enclosed self-adhesive rubber pads, if applicable.
- Do not rest any objects on top of the device and do not stack multiple devices.
- Keep all ventilation slots of the device clear of obstruction.
- Rack installation with the optional LANCOM [Rack Mount](#) / [Rack Mount Plus](#) (separately available)





LANCOM
SYSTEMS



Cloud-ready

LED description & technical details

Hardware Quick Reference LANCOM 1650E

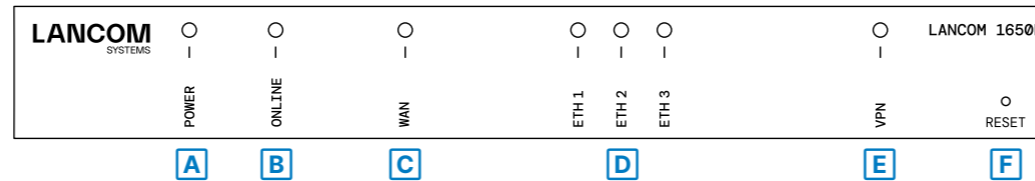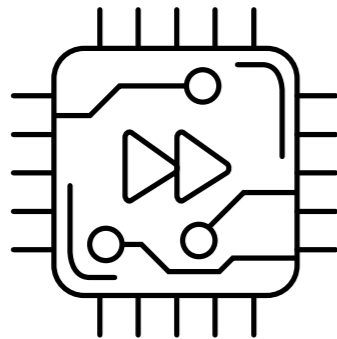

A Power

Off	Device switched off
Green, permanently*	Device operational, resp. device paired / claimed and LANCOM Management Cloud (LMC) accessible
Red/green, blinking	Configuration password not set. Without a configuration password, the configuration data in the device is unprotected.
Red, blinking	Hardware error
Red, blinking slowly	Time or charge limit reached/error message occurred
1x green inverse blinking*	Connection to the LMC active, pairing OK, device not claimed
2x green inverse blinking*	Pairing error, resp. LMC activation code not available
3x green inverse blinking*	LMC not accessible, resp. communication error

B Online

Off	WAN connection inactive
Green, blinking	WAN connection is established (e.g. PPP negotiation)
Green, permanently	WAN connection active
Red, permanently	WAN connection error

C WAN

Off	No connection (no link)
Green, permanently	Network connection ready (link)
Green, flickering	Data transmission

D ETH1 - ETH3

Off	No connection (no link)
Green, permanently	Network connection ready (link)
Green, flickering	Data transmission

E VPN

Off	No VPN connection active
Green, permanently	VPN connection active
Green, blinking	Establishing VPN connection

F RESET

Pressed up to 5 seconds	device restart
Pressed until first flashing up of all LEDs	configuration reset and device restart

*) The additional power LED statuses are displayed in 5-seconds rotation if the device is configured to be managed by the LANCOM Management Cloud.

This product contains separate open-source software components which are subject to their own licenses, in particular the General Public License (GPL). The license information for the device firmware (LCOS) is available on the device's WEBconfig interface under "Extras > License information". If the respective license demands, the source files for the corresponding software components will be made available on a download server upon request.

Hardware

Power supply 12 V DC, external power adapter
For an overview of the power supplies compatible with your device, see www.lancom-systems.com/kb/power-supplies.

Environment Temperature range 0 – 40 °C; humidity 0 – 95 %; non-condensing

Housing Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; (W x H x D) 210 x 45 x 140 mm

Interfaces

WAN 10 / 100 / 1000 Mbps Gigabit Ethernet

ETH 3 individual 10 / 100 / 1000-Mbps Fast Ethernet ports; operate as switch ex-factory.
Up to 2 ports can be switched as additional WAN ports.

USB USB 2.0 Hi-Speed host port for connecting USB printers (USB print server), serial devices (COM-port servers), or USB data media (FAT file system)

Configuration interface Serial USB-C configuration interface

WAN protocols

Ethernet PPPoE, Multi-PPPoE, PPTP (PAC or PNS) and IPoE (with or without DHCP)

Package content

Cable 1 Ethernet cable, 3m

Power adapter External power adapter

Hereby, LANCOM Systems GmbH | Adenauerstrasse 20/B2 | D-52146 Wuersele, declares that this device is in compliance with Directives 2014/30/EU, 2014/35/EU, 2011/65/EU, and Regulation (EC) No. 1907/2006. The full text of the EU Declaration of Conformity is available at the following Internet address: www.lancom-systems.com/doc



LANCOM
SYSTEMS



Cloud-ready