
LANCOM Systems

LANCOM GS-1108P

1 2 3 4 5 6 7 8

Hardware Quick Reference LANCOM GS-1108P



(1) TP Ethernet ports

Connect one of the TP Ethernet ports 1-8 via an Ethernet cable to your end device or another LAN switch.



Before initial startup, please make sure to take notice of the information regarding the intended use in the enclosed installation guide!

Operate the device only with a professionally installed power supply at a nearby power socket that is freely accessible at all times.




 \rightarrow For devices to be operated on the desktop, please attach the adhesive rubber footpads \rightarrow Do not rest any objects on top of the device

 \rightarrow Please note that support service for third-party accessories is excluded.

Please observe the following when setting up the device

 \rightarrow The power plug of the device must be freely accessible.



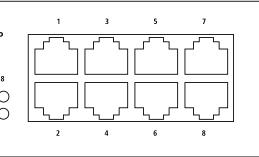


(1)

2 Power connector (back side of the device)

Supply power to the device via the power connector on the back. Please use the supplied IEC power cable.



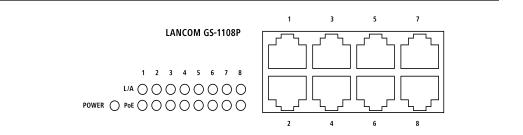

(1)2

1 POWER

Device switched off	
Device operational	

2 L/A / PoE	
L/A	
Green permanently	Link 1000 Mbps, no data transmission
Green flickering	Data transmission 1000 Mbps
Orange permanently	Link 10 / 100 Mbps, no data transmission
Orange flickering PoE	Data transmission 10 / 100 Mbps
Off	Power supply for connected device disabled
Green	Power supply for connected device enabled

Hardware

Power supply	Internal p
Power consumption	Max. 70 v
Environment	Temperat
Housing	Robust m
	> W x H >
Number of fans	1 quiet fa
Interfaces	
ETH	8 TP Ethe

Package content

Cable

 \rightarrow Keep all ventilation slots on the side of the device clear of obstruction

Hereby, LANCOM Systems GmbH | Adenauerstrasse 20/B2 | D-52146 Wuerselen, declares that this device is in compliance with Directives 2014/30/EU, 2014/35/EU, 2011/65/EU, and Regulation (EC) No. 1907/2006. The full text of the EU Declaration of Conformity is available at the following Internet address: <u>www.lancom-systems.com/doc</u>

& con 0 untii

ō

ower supply unit (110–230 V, 50-60 Hz)
watts
ture range 0–40 °C; humidity 10–90 %; non-condensing
netal housing with screw-on 19" mounting brackets (220 × 44 × 135 mm k D), network connectors on the front
n

8 TP Ethernet ports 10 / 100 / 1000 Mbps

1 IEC power cord

tails

ptio

Ü