


LANCOM SFAN-YS7

Hot-swappable fan modules for uninterrupted operation of the LANCOM YS-7154CF with F2B or B2F airflow

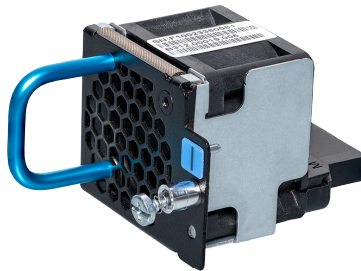

With the ventilation concept of the LANCOM YS-7154CF tailored to your requirements, you not only maximize performance and service life but also protect your device reliably from overheating. To ensure continuous cooling during rack operation, the aggregation switch is available in two hardware variants with different fan modules: axial fans that support either front-to-back (F2B) or back-to-front (B2F) airflow direction. In the event of a fan failure, the fan module LANCOM SFAN-YS7-F2B or SFAN-YS7-B2F can be replaced during operation, ensuring that your network remains accessible at all times.

- Minimum 8,500 rotations/minute
- Easy to replace without tools
- Minimum air flow rate 19 m3/h
- Operating time of at least 50,000 h at 40 °C
- LANCOM SFAN-YS7-F2B for LANCOM YS-7154CF-F2B
- LANCOM SFAN-YS7-B2F for LANCOM YS-7154CF-B2F



LANCOM SFAN-YS7

Item number(s)

61918	Hot-swappable fan unit for the LANCOM Switch YS-7154CF-F2B, as an accessory article in case of fan failure to increase the lifetime of the switch
-------	---

61919	Hot-swappable fan unit for the LANCOM Switch YS-7154CF-B2F, as an accessory article in case of fan failure to increase the lifetime of the switch
-------	---
