



Hardware Quick Reference


LANCOM GS-2326+

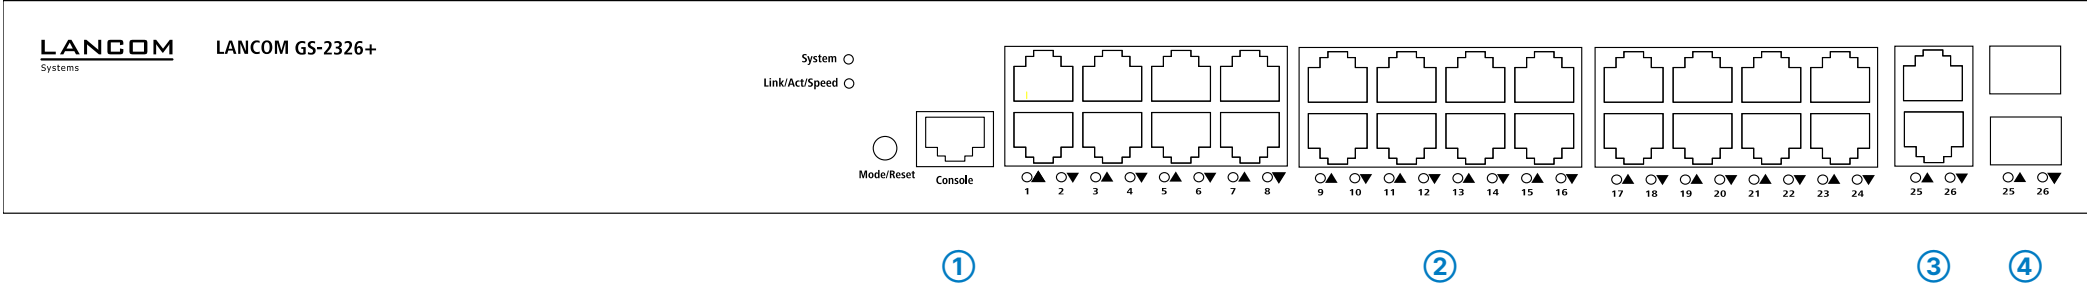

- 1 Configuration interface
- 2 TP Ethernet interfaces
- 3 TP Ethernet interfaces (combo ports)



- 4 SFP interfaces (combo ports)
- 5 Power connector and grounding point (device back side)
- 6 ATTENTION: High touch current possible!



Before initial startup, please make sure to take notice of the information regarding the intended use in the enclosed installation guide!


Operate the device only with a professionally installed power supply at a nearby power socket that is freely accessible at all times.



Please observe the following when setting up the device

- The power plug of the device must be freely accessible.
- For devices to be operated on the desktop, please attach the adhesive rubber footpads
- Do not rest any objects on top of the device
- Keep all ventilation slots on the side of the device clear of obstruction
- Mount the device into a 19" unit in a server cabinet using the provided screws and mounting brackets.
- Please note that support service for third-party accessories is excluded.

Mounting & connecting



- 1 System / Link/Act/Speed
- 2 Mode/Reset button
- 3 TP Ethernet ports
- 4 SFP ports

Hardware	
Power supply	Internal power supply unit (100–240 V, 50–60 Hz)
Power consumption	Max. 26 W
Environment	Temperature range 0–40 °C, humidity 0–95 %; non-condensing
Housing	Robust metal housing, 1 HU with mounting brackets for 19" installation, 442 × 44 × 170.3 mm (W x H x D)
Number of fans	None; fanless Design, no rotating parts, high MTBF
Interfaces	
ETH	24 TP Ethernet ports 10 / 100 / 1000 Mbps 2 Combo ports (TP/SFP) 100 / 1000 Mbps (SFP) and 10 / 100 / 1000 Mbps (TP) 26 concurrent ports in total
Console	Serial configuration interface / COM port: 115,200 baud
Package content	
Mounting brackets	Two 19" brackets for rack mounting
Cables	1 IEC power cord 230 V, 1 serial configuration cable 1.5 m